



Window Method For Fusing Appliqué

Sandie Massett


www.EmeraldValleyQuilters.org

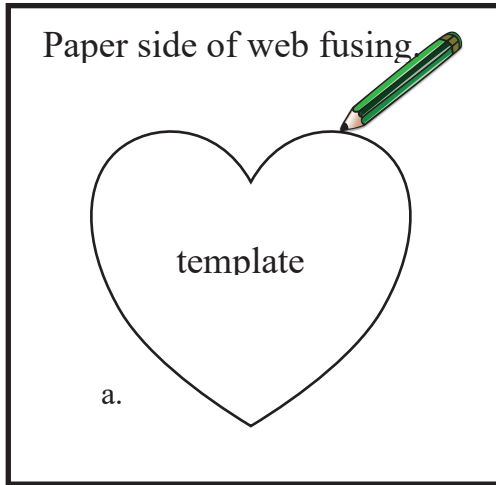



Cut about 1/2" away from drawn line, dashed line illustrates..

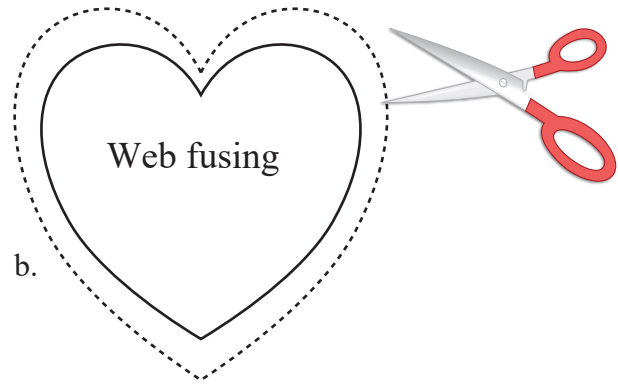


Cut 1/4 - 1/2" away from inside of edge making a hole.

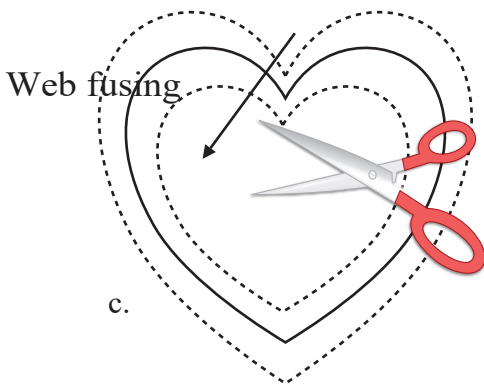

Iron onto **wrong** side of appliqué fabric.

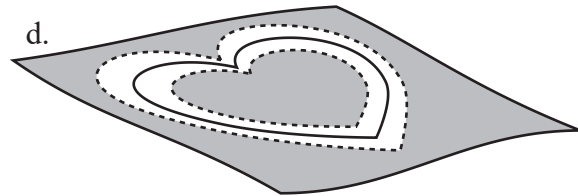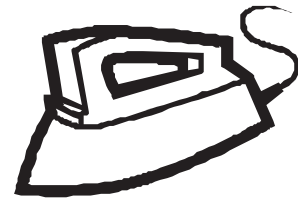

Cut along line drawn from template and fuse in place on your project.

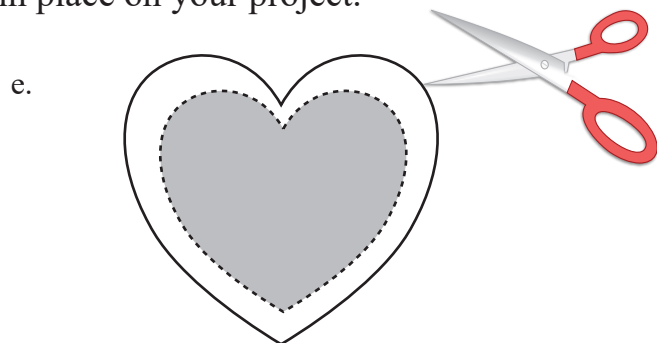

The center of the appliqué piece is less bulky. You can machine stitch around the edge of the appliqué to help secure it in place,

Emerald Valley Quilters



Recommendations

Heat n Bond ® - iron on adhesive

Steam a Seam Lite ®

Frixion Pen made by Pilot ®

This pens ink disappears after it has been ironed.

It can be found in most office supply stores.

Office Max or Staples do carry this pen. If the

pen stops working for you place in refrigerator

for a while. Always test on your fabric first. The

ink sometimes will show up as white after it is

ironed.

Applique Foot for your sewing machine.

Card Stock

Exacto Knife ®